



## INDUCTION MOTOR ROTOR FAULT DETECTION USING ENHANCED FEED FORWARD NEURAL NETWORK

Sandhya Gotam, Prof. AlkaThakur

Dept. Electrical Engineering,  
Sri Satya Sai University of Technology & Medical Science (SSSUTMS) Sehore, India

**Abstract:** Induction motor rotor fault detection is one of hot topic in between researchers in the last decade. Reason beside this maintenance of induction motor is the major concerns in modern industry where failure detection on motors increases the useful life cycle on the machinery. Broken rotor bars are among the most common failures in induction motors. Early detection of faults in electrical machines are imperative because of their diversity of use in different fields. A suitable fault monitoring scheme helps to stop propagation of the failure or limit its escalation to severe degrees and thus prevents unscheduled downtimes that cause loss of production and financial income. Detection of broken rotor bar of induction motor with the help of ANN was the focus of the proposed work. The mathematical models of induction motor in both healthy as well as fault condition were developed in order to simulate the faults of varying intensity at different load conditions. Various parameters of induction motor are recorded in all the different conditions. These recorded parameters are used to train the Artificial Neural Network. The output of the ANN shows that proposed technique successfully detects the presence of broken rotor fault of induction motor. Shows better values 10-1 error at 10 epochs. Also discuss Response Time of proposed ANN detection is good as compare to other previous method. Mathematical model help of understand the basic model. The proposed shows good result as compare different methods of fault detection like SVM, fuzzy logic, DWT, FFT based.

**Keywords:-** Induction Motor, Induction Motor Fault ,Rotor Fault Analysis and Identification, Broken Rotor Bar, Artificial Neural Network and Diagnosing Techniques.

**Introduction:** Induction motors are most widely used industrial load and consume a major part of overall electrical consumption.

**For Correspondence:**

sandhyag4k@gmail.com

Received on: July 2017


Accepted after revision: August 2017

Downloaded from: [www.johronline.com](http://www.johronline.com)

Fault identification in electrical machines and power systems is increasing interest research area for academicians as well as for industry. The wide variety of environments and conditions motor exposed to, mis-operations and manufacturing defects can make it subject to incipient faults or gradual deterioration and can lead to motor failure if left undetected. Most electric motor failures interrupt process,

reduce production and may damage related machinery. Sometimes a small HP motor failure can also create hours of plant stoppage in continuous processing.


The Squirrel cage induction motors are most widely used electrical machines for industrial, domestic and commercial applications. These motors have advantages such as robustness, simplicity of its construction and highly reliable [1-2]. Since, Induction motors are undoubtedly reliable but we cannot avoid the possibility of failure also. These failure conditions are taking place because of its component failure. If the failure occurs in the machine that failure ought to be diagnose as early as possible. If these failure conditions are not diagnosed on time, the failure component will affect whole motor operation badly and will become more catastrophic. Consequently, large revenue losses and maintenance will be needed [5].

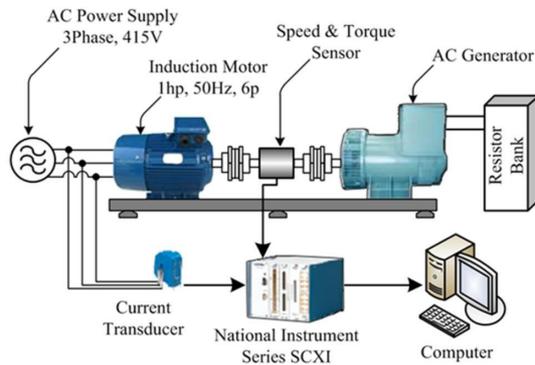

**Fig 1 – Shows the Fault detection Setup**

**Fault Detection:** An Automated fault diagnostics and condition monitoring are important parts of most of the world’s industrial processes. It is difficult to develop an analytical model that adequately describes induction motor performance in its all operation points with any power source in case of induction motor fault identification. If the expert knowledge of process is available a simple signal-based diagnostics can be adopted with knowledge-based models. It is difficult for a

human expert to distinguish fault from the normal operation.

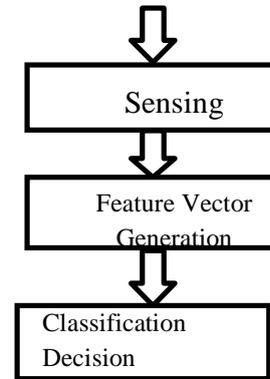


**Fig 2: Basic Pattern Recognition System**

Multiple information sources may need for accurate decision. Thus, the data-based models are the most interesting approach for the induction motor diagnostics [10]. In this presented work, the fault identification system is built using RMS features retrieved from the voltage and current signals and decision making part relies on data- based (pattern) classification model.

**ANN Based Approach:** The proposed ANN Based method deals with the detection of broken rotor bar of an induction motor. The problem is approached through mathematical modeling of induction motor. Both the models, for healthy as well as faulty motor, are developed using MATLAB simulink. The model is used to simulate different conditions of fault with varying number of broken bars. Parameters like three-phase voltage, 3 phase current and THD of all voltages and currents are acquired from the simulated model. The data thus generated is used to train Artificial Neural Network which diagnoses the condition of motor. The results obtained prove the effectiveness of proposed method. Detection of broken rotor bar of induction motor with the help of ANN was the focus of the paper. The mathematical models of induction motor in both healthy as well as fault condition were developed in order to simulate the faults of varying intensity at different load conditions. Various parameters of induction motor are

recorded in all the different conditions. These recorded parameters are used to train the Artificial Neural Network. The output of the ANN shows that proposed technique successfully detects the presence of broken rotor fault of induction motor. [01]

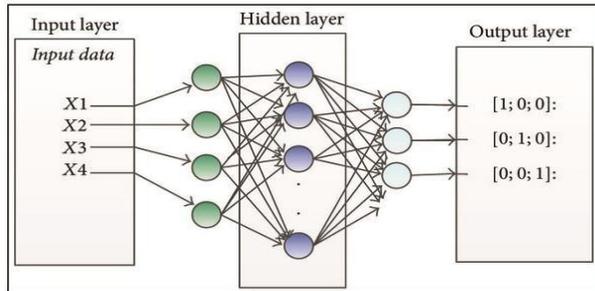

**Fig. 3 ANN based Motor Rotor Fault Detection**

In fact, fuzzy logic is reminiscent of human thinking processes and natural language enabling decisions to be made based on vague information. Therefore, this paper applies fuzzy logic to induction motors fault detection and diagnosis. The motor condition is described using linguistic variables. Fuzzy subsets and the corresponding membership functions describe stator current amplitudes. A knowledge base, comprising rule and data bases, is built to support the fuzzy inference. The induction motor condition is diagnosed using a compositional rule of fuzzy inference. Experimental results are presented in terms of accuracy in the detection motor faults and knowledge extraction feasibility. The preliminary results show that the proposed fuzzy approach can be used for accurate stator fault diagnosis. In this paper, the realization of the fault in stator winding in a three-phase induction motor has been considered. In the first place, the induction motor was simulated by dynamic equations to that effect; afterwards, the equations were revisited by accounting faults in one of the phases. As for the issue of fault realization, the fuzzy logic and its application in clustering have been used. As an advantage of this method, we can refer to its high accuracy, online state as well as its deprivation from an accurate model for the system. [02]

**Proposed Mathematical Modelling of ANN based System:** Modelling of induction motor with broken rotor bar faults represent broken rotor bar, damage in during etc. The focus here is on broken rotor bars. In the condition of broken rotor bar fault all the equations of healthy motor would remain as it is except the rotor impedance. When fault occurs, the rotor impedance will increase, but, as the change in reactance is very small, hence is being neglected here. So the equation of rotor resistance will be modified as derived below [09];

$$r_r = \frac{R_b}{N/3} \frac{1}{K^2} \tag{1}$$

Let  $r_r$  rotor resistance referred

$N$ = total number of rotor bars

$n$ = numbers of broken rotor bars

Where,  $k$  is the transformation ratio. The rotor resistances, after considering  $n$  numbers of broken bars, becomes

$$r_r = \left( \frac{R_b}{\frac{N}{3} - n} \right) \frac{1}{K^2} \tag{2}$$

Now, change in rotor resistance


$$\Delta r = \frac{3n}{N - 3n} \times r_r \tag{3}$$

The end rings and the magnetizing current are not taken into account [10]. So, the equations for rotor becomes


$$\frac{d\lambda_{qr}}{dt} = -(r_r + \Delta r) \cdot i_{qr} - (\omega - \omega_r) \lambda_{dr} \tag{4}$$

$$\frac{d\lambda_{dr}}{dt} = -(r_r + \Delta r) \cdot i_{dr} - (\omega - \omega_r) \lambda_{qr} \tag{5}$$

The below figure shows the Mathematical Model of induction motor for broken rotor bar system. In this model there are three sum system available : Q-block, D- Block and Rotor Block. In below shows the subsystem of D, Q and rotor block. That is in above figure 4.2.

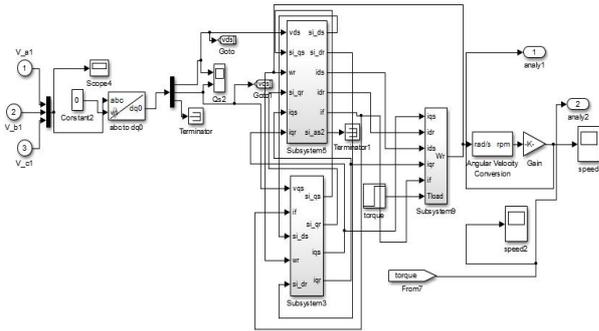


**Fig 4 Shows the Mathematical Model of Induction Motor**

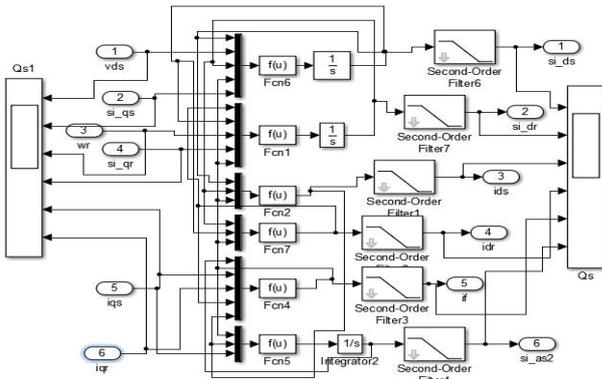


**Fig. 5 Sub block of d block**

**Simulation and Results:** In the above figure 5 and figure 5 is the main model of proposed method is contain different sub system sub systems are describe at proposed model.

**Parameters used for diagnosis:** In the below figure 6 and figure 7 shows the block parameters of rotor measurement and stator measurement of motor. Shows in below. There are different parameters are masked in the list which we want to analyzed for training data and train data base required. The main focus of stator current, rotor current and torques.

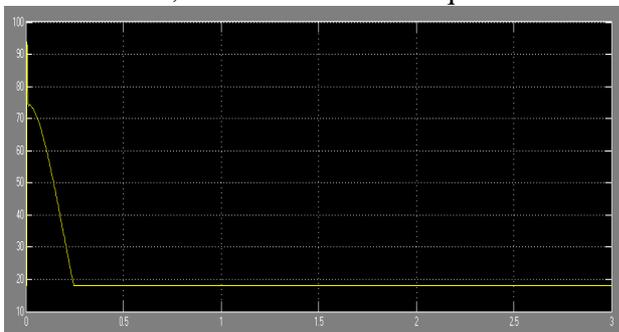


**Fig 6 Shows the Different parameter for analysis Speed**

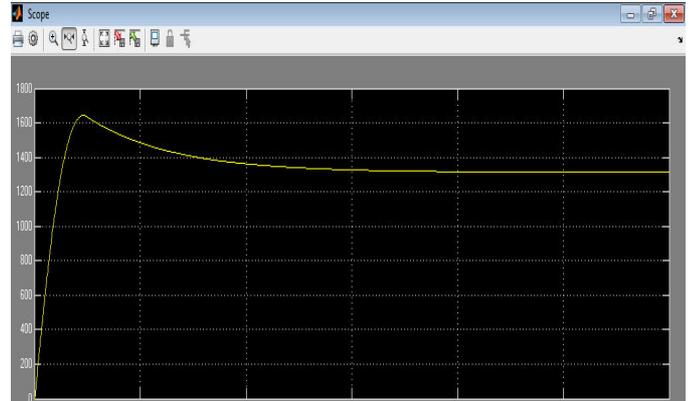


**Fig 7 Shows the Different parameter for analysis Force**

There are different parameters are shown in the above figure like total number of broken rotor bar, number of poles, rotor inductance and others. In the proposed thesis work focused on broken rotor bar because when broken rotor bars are broke they directly affected the health on induction motor health. Induction motor health is directly depended on the rotor bar. In this proposed simulated work focused on the induction motor heath assessment in different broken rotor bar conditions. Total number of broken rotor bar in the induction motor in twenty eight. For the analysis simulate the proposed model up to 1000 times and collect the different data of motor under different broken rotor bar condition. Use this data to analyze in the unreal network tool box in Matlab

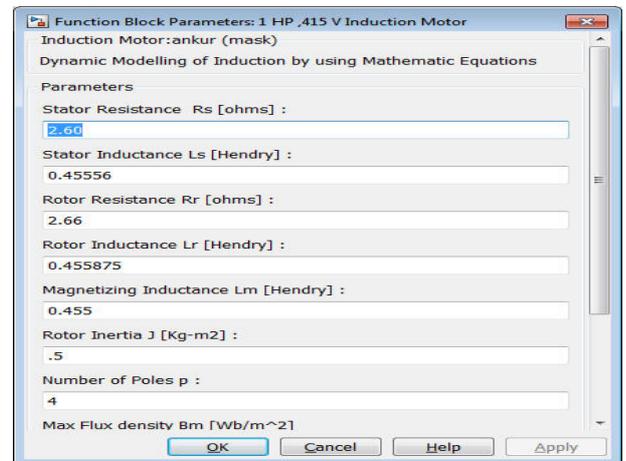


**Fig 8 Induction motor and its parameters**

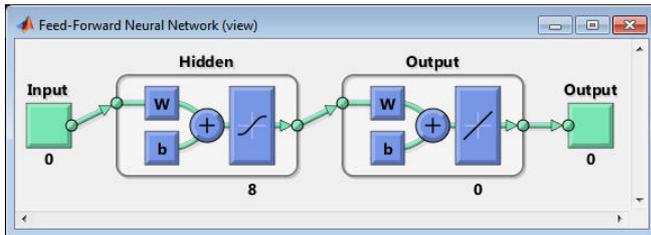

**Fig. 9 Used Neural Network**

For the analyzed of the proposed system use a feed forward neural network. There are different types of neural networks available according the inner level of complexity uses a different network. Output of Mean Square Error

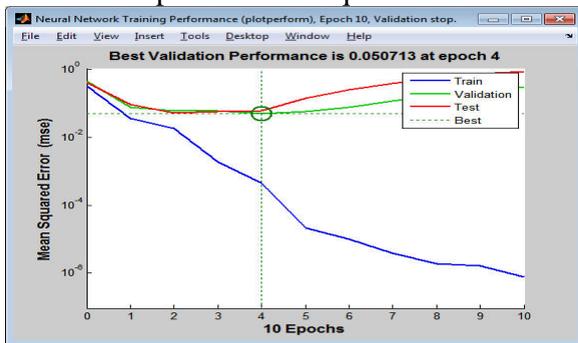

**Fig. 10 Shows the Optimum performance**

The above figure 10 shows the mean square error of proposed method. There are four lines shows in the figure train data, validate data, testing and best or optimum result. The above figure shows the optimum performance output. The presented system for motor rotor fault detection best value of optimization using ANN is  $10^{-1}$ . Shown in above figure. Its shows response time system. The above graph is created in between x and y axis. X axis shows the number of epochs and y axis shows the error mean square error. Optimum result obtains with low value of error as compare to pervious method.

**Result Comparison**

**Table 5.1 Result Comparison**

S. No.	Parameters	Previous method	Proposed Method
1	Mean Square	10-10	10-6
2	Epochs	180	10
3.	Best Optimum Result	170(Epochs) at 10-10	4(Epochs) at 0.04
4.	Number of Samples	12500	1000

In the above figure shows the ANN over simulated results at the different broken rotor bar conditions.

**Table 5.2 Broken Rotor Bar based Comparison**

Under Good Condition	0 to 5	Induction motor in good condition
In between Good and Bad Condition	5 to 8	Induction motor started broken age
Under Bad Condition	Above 8	Replace the Induction motor

**Conclusion:** Detection of broken rotor bar of induction motor with the help of ANN was the focus of the presented work. The mathematical models of induction motor in both healthy as well as fault condition were developed in order to simulate the faults of varying intensity at different load conditions. Various parameters of induction motor are recorded in all the different conditions. These recorded parameters are used to train the Artificial Neural Network. The output of the ANN shows that proposed technique successfully detects the presence of broken rotor fault of induction motor. Shows better values  $10^{-9}$  error at 1000 epochs. Response Time of proposed ANN detection is good.

**References:**

[1].Rakesh kumar A. Patel, Dr. B.R. Bhalja, Induction motor rotor fault detection using artificial neural network, Con, IEEE, 2015.  
 [2].Monia Ben Khader Bouzid, New expressions of symmetrical components of the induction motor under stator faults, IEEE Transactions on Industrial Electronics, Vol. 60, No. 9, 2013  
 [3]. Y. Han and Y. H. Song, Condition monitoring techniques for electrical equipment- a literature survey, iee transactions on power delivery, Vol. 18, No.1, 2003.  
 [4]. Carlos Pezzani, Pablo Donolo, Guillermo Bossio, Marcos Donolo, Armando guzman, Stanley E. Zocholl, Detecting broken rotor bars with zero setting protection, 48th industrial & commercial power systems technical conference IEEE, 2012.

- [5]. S. Hamdani, H. Mezerreg, B. Boutikar, N. Lahcene, O. Touhami and R. Ibtouen, Rotor fault diagnosis in a squirrel cage induction machine using support vector, International conference on Electrical Machines IEEE, 2012.
- [6]. Design of support vector machine classifier for broken bar detection, IEEE International Conference on Control Applications, 2012.
- [7]. P.C. Krause, O. Wasynczuk, S.D. Sudhoff, Analysis of electric machinery and drive systems, IEEE Press, New York, 1996.
- [8]. Hamid Fekri Azgomi, Javad Poshtan, Induction motor stator fault detection via fuzzy logic, 21st Iranian Conference, IEEE, 2013.
- [9]. Filippetti, F.; Martelli, M.; Franceschini, G.; Tassoni, C, Development of expert system knowledge base to on-line diagnosis of rotor electrical faults of induction motors, Conference Record of the IEEE Industry Applications Society Annual Meeting, 1992.
- [10]. Marius Media, Bogdan Venescue, Induction motor rotor cage diagnosis with stockwell and wavelet time frequency stator current analysis, U.P.B. Sci. Bull., Series C., Vol. 75, Issue 4, 2013.